

Public Record Documents





PLEASE PRINT CLEARLY

DESIGN REVIEW BOARD MEETING
NOVEMBER 28, 2018 – SIGN-IN SHEET

[illegible]

400 THIRD STREET THE BARN SHOPS ROOF SIGN



DESIGN REVIEW BOARD
NOVEMBER 28, 2018





LOCATION



EXISTING CONDITIONS



HISTORIC CONDITIONS

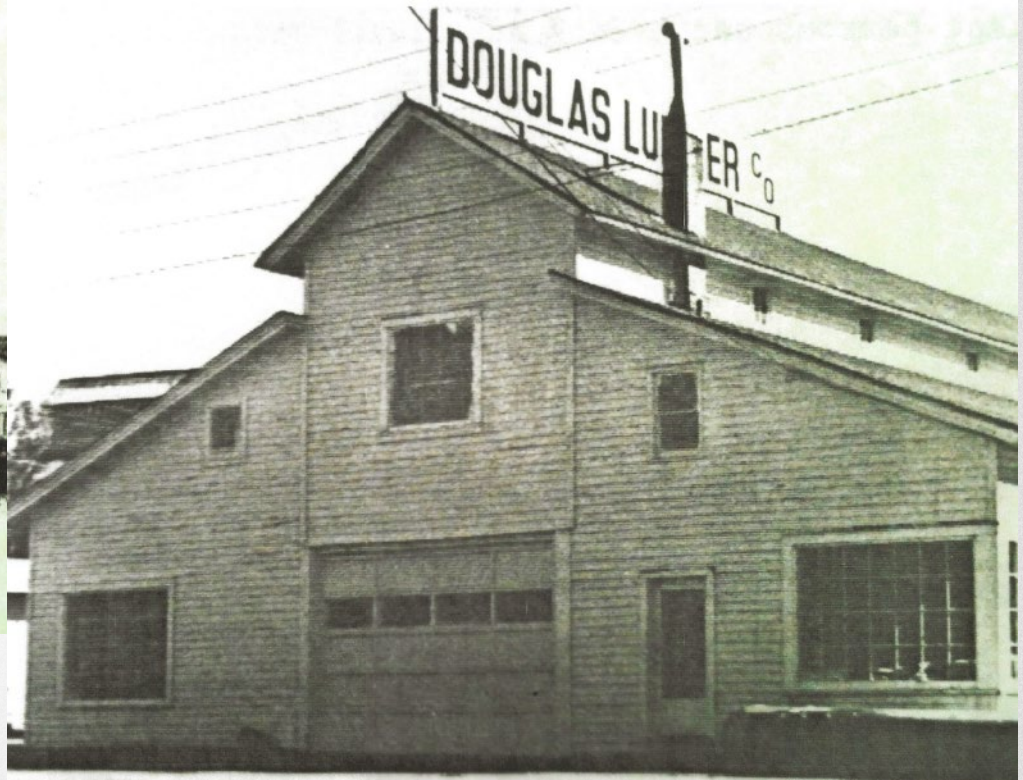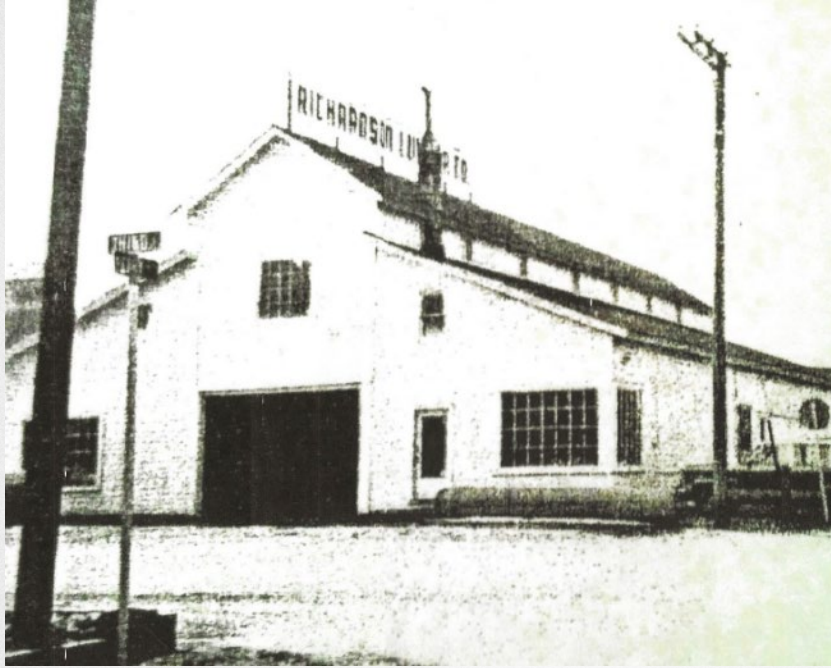

PROPOSED ROOF SIGN





FINDINGS:

THE PROJECT MEETS THE INTENT OF THE DOD;
THE PROJECT HELPS FURTHER THE GOALS AND
OBJECTIVES SET OUT FOR DOWNTOWN CASTLE ROCK
THROUGH ITS MASTER PLAN AND DESIGN GUIDELINES.



QUESTIONS & DISCUSSION

PROPOSED MOTIONS:

OPTION 1: APPROVAL ROOF SIGN

I MOVE TO APPROVE THE ROOF SIGN AND ASSOCIATED LIGHTS FOR 400 THIRD STREET.

OPTION 2: APPROVAL WITH CONDITIONS

I MOVE TO APPROVE THE ROOF SIGN AND ASSOCIATED LIGHTS FOR 400 THIRD STREET
WITH THE FOLLOWING CONDITIONS:
(LIST CONDITIONS)

OPTION 3: DENIAL

I MOVE TO DENY THE ROOF SIGN AND ASSOCIATED LIGHTS FOR 400 THIRD STREET.

OPTION 4: CONTINUE ITEM TO NEXT HEARING

I MOVE TO CONTINUE THE ROOF SIGN AND ASSOCIATED LIGHTS FOR 400 THIRD STREET
TO THE NEXT REGULAR DESIGN REVIEW BOARD MEETING ON DECEMBER 12, 2018.

Style A

Gooseneck

Job Information:

Project:

Prepared by:

Comments:

Approved by:

Features:

Mounting Style: Top Mounted Fixture with 3/4 NPT or 1/2 NPT Threads



Material: Aluminum extrusion Standard, Galvanized steel available.











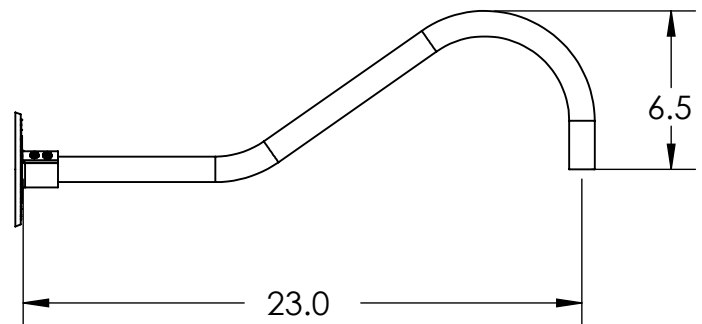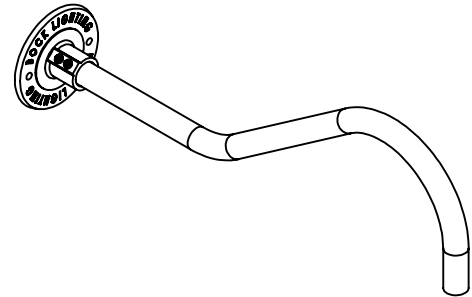











Material Diameter: 3/4 NPT Standard, 1/2 NPT Available.

Finish: Powder Coat

Standard: GN23A-75 = 23in

Customization Options: Can be shortened to 16in.



 G0 Black	 G1 White	 G2 Red RAL 3000 SG	 G3 Yellow RAL 1018 SG
 G4 Blue RAL 5005 SG	 G5 Green Farmer Green	 G6 Brown 8081 SG	 G7 Verdigris
 G8 Dark Bronze	 G9 Silver	 G10 Dark Green	 G11 Copper
 G12 Brushed Aluminum	 G13 Tan RAL 1001	 G14 Gunmetal	 G15 Rust
 G16 Silver Wrinkle (Galvanized Look)	 G17 Architectural Bronze	 G18 Rock Garden Green, Gloss	
 G50 Neon Orange RAL 2004 SG	 G51 Neon Pink	 G52 Neon Yellow RAL 1021	

 GV
Steel Galvanized

BockLighting

Phone: (216) 912-7050 Fax: (216) 912-7051
sales@bocklighting.com
www.bocklighting.com





Standard Dome

RLM Reflectors 500 Series

Job Information:

Project:

Prepared by:

Comments:

Approved by:

Features:

Reflector: Spun from heavy gauge aluminum with an rolled in bead.

Lamp Types:

Incandescent: 300W, Medium base porcelain socket.

LED: Requires External Driver Enclosure.

LED(850/1250): Cree LMH2 Module with Osram Driver

LVE01: Cree CXA COB with Osram Driver, Requires Glass Jar

CFL: Requires External Driver Enclosure.

HPS: Requires External Driver Enclosure.

MH: 150W Max Requires External Driver Enclosure.

Mounting: Top Mounting with 3/4 NPT. For outdoor use, Teflon tape should be used around threads.

Finish: Powder Coat Finish for Outdoor use. Complete color selection found at bocklighting.com/colors.

Certification: Built to UL 1598 and UL Certified for Damp and Wet Locations.



Size	Diameter	Height	Max Wattage
512	12"	8-1/4"	100W
514	14"	8-1/4"	150W
516	16"	9-3/4"	200W
518	18"	11-5/8"	300W
520	20"	12-5/8"	300W

Note: This isn't a complete spec to order from. Bock offers more than what is shown on a single page. Use the RLM Catalog or RLM Configurator to make a valid part number and submittal.

<http://www.bocklighting.com/sales/rlm-configurator>

Ordering Guide:

Example: 512-G0 / MED5 / 643-G0

Series	Lamp Type	Mounting
512 = 12" Standard Dome 514 = 14" Standard Dome 516 = 16" Standard Dome 518 = 18" Standard Dome 520 = 20" Standard Dome	MED = Incandescent Base LED(850/1250) = LMH2 Module LVE01-(27/35/40K) @ (850/1250/1400/1800) = Cree CXA COB, Universal PSMH(50/70/100/150) = Pulse Start Metal Halide HPS(50/70/100/150) = High Pressure Sodium	Stem 640-(50/75) = Stem Mounting, 1/2" or 3/4" Cord 643 = Cord Mount, 10ft. Gooseneck GN23A GN24D